

Connettori maschio per C.S.

Headers for P.C.B.

Connecteurs mâle pour C.I.

Stiftleiste für Leiterplatten

CPM..FV

CPM..SQFV

CPM..FV

CPM..SQFV

Blocco unico
Monobloc

Single block
Einzelblock

Blocco unico
Monobloc

Single block
Einzelblock

Poli
Pôles



Poles
Polzahl

2/20

Poli
Pôles

Poles
Polzahl

2/10

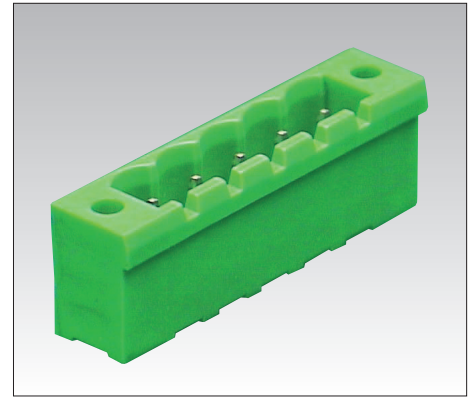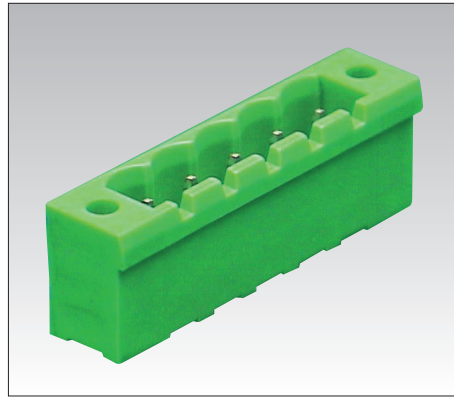

Passo Pas	Pitch Rastermaß	mm
Tensione nominale Tension nominale	Rated Voltage Bemessungsspannung	V
Corrente nominale Intensité nominale	Rated Current Bemessungsstrom	A

5	5,08
320	
20	

10	10,16
630	
20	

Temperatura Température	Temperature Temperatur	°C
Corpo isolante Corps isolant	Housing Isolierkörper	

160
PA - UL 94 V0

160
PA - UL 94 V0

	IMQ	EN61984
	VDE	EN61984
	UL	UL1059
	cUL	UL1059 + C22.2 n°158

V	A	mm²/AWG
320	20	0,2 ÷ 2,5
300	12	24 ÷ 12

V	A	mm²/AWG
630	20	0,2 ÷ 2,5
300	12	24 ÷ 12

Poli Pôles	Poles Polzahl	X →
Colore standard Coloris standard	Standard colour Standardfarbe	Y →
Altri dati Autres données	Other information Weitere Informationen	pag. Seite

min 2 - max 20
VE
-

min 2 - max 20
VE
-

Ordinazione Référence de commande	How to order Bestellschlüssel				
CPM 5 / X FV Y ...					
Tipo Type	Passo Pitch	Poli Poles	Versione Version	Colori Colors	Numerazione Printing
Type	Pas	Pôles	Version	Couleurs	Marquage
Typ	Rastermaß	Polzahl	Version	Farben	Bedruckung

Altri colori a richiesta. / Autres couleurs sur demande. / Andere Farben bei Bedarf.

- VE
- GR
- NE
- AR
- BL
- RO

